


## DOUBLE-PORTED CONTROL VALVES TYPE S1B

### APPLICATION AREA:

Single-ported globe control valves type S1B are used in automatic and remote control installations as low control elements to adjust flow of liquids, steam and gases. Wide range of materials, excellent pressure and temperature parameters, multiple design variants, meeting requirements of various processes, make the valves applicable under the most demanding working conditions in power generation, petroleum chemistry, heating, chemical industry, metallurgy, etc.

### FEATURES:

- various materials of valve body and internal parts, adapted to specific working conditions,
- design provides noise reduction, enhanced resistance to cavitation and flashing, and elimination of choked flow,
- wide range of nominal pressures, PN10 to CL2500, and flow ratio and control characteristics,
- reduction in aggressive and toxic media emissions to environment through application of bellow seal bonnets or bonnet packings meeting requirements of TA - LUFT,
- easy assembly and dismantling of valve internal parts for maintenance and service,
- high durability and reliability due to application of top-class materials and surface improvement processes (burnishing, stellitizing, heat treatment, CrN coatings),
- possibility of mating with reverse action P/R (column) and P1/R1 (cast yoke) multi-spring actuators, and changing the spring range with no extra parts (keeping the number of springs),
- possibility of fitting actuators with lateral (P1/R1) or top (P/R) handwheel,
- possibility of performing diagnostics of "valve-actuator" due to application of smart electro-pneumatic positioners,
- wide range of electric actuators,
- special executions for oxygen, hydrogen, gas fuels, low temperature fluids (liquid oxygen, liquid nitrogen), acid gases containing H<sub>2</sub>S; with heat jacket; for explosive atmospheres as per ATEX Directive 94/23/EC,
- design and production process meet the requirements of Quality Management System ISO 9001 and Directive 97/23/EC, and regulations of AD2000 Merkblatt, designated for installation on pipelines.

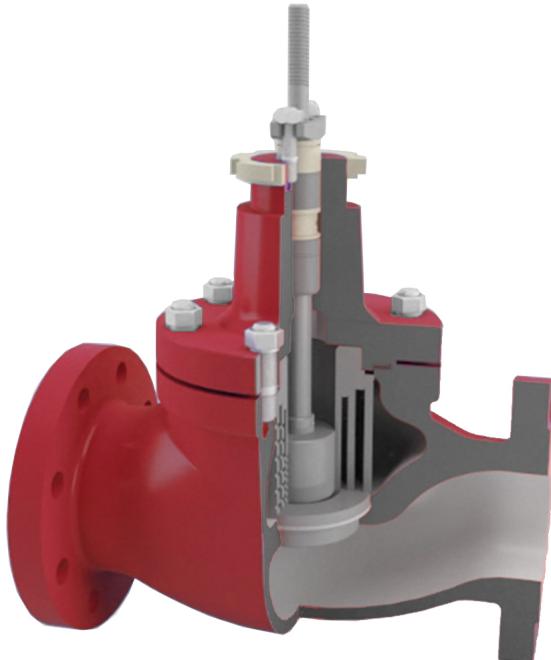

## DESIGN AND TECHNICAL SPECIFICATION:

**Body (1):** single-ported, cast

Nominal size: DN 25; 40; 50; 80; 100; 150; 200; 250; 300

Nominal pressure:

- PN10; 16; 25; 40; 63; 100; 160; 250; 320; 400 (as per PN-EN 1092-1:2010)
- PN-H-74306:1985; PN-H-74307:1985.
- CL150; CL300; CL600; CL900; CL1500; CL2500 (as per PN-EN 1759-1:2005).

divided as follows:

DN25...250: PN10...100; CL150...CL600 \*)

DN25...150: CL900; PN160 \*)

DN25...100: PN250...400; CL1500...CL2500 \*)

\*) higher nominal pressures available after agreement with the manufacturer

Connections:

- flanged: as per Table 1

- butt welding ends BW, as per Table 19 and 20

- socket welding ends SW, as per Table 21

Steel flanges CL150; CL300; CL600; CL900; CL1500; CL2500 are so designed that they can be assembled with flanges as per American standards ANSI/ASME B16.5 and MSS SP44. In American standards flanges are identified with nominal values in "Classes", to which nominal pressure (PN) values as per PN-ISO 7005-1:2002 correspond.

Equivalent identification as per PN are:

CL150: PN 20 CL300: PN 50

CL600: PN 110 CL900: PN 150

CL1500: PN 260 CL2500: PN 420

Table 1. Flanged end connections

Nominal pressure	Facing of flange types			
	Raised face	Groove	Recess	Ring - joint
	Identification			
PN10; 16; 25; 40; 63; 100; 160; 250; 320; 400	B <sup>3)</sup>	D <sup>1)</sup>	F <sup>1)</sup>	-
CL150; 300	B <sup>3)</sup>	DL ( D1 <sup>2)</sup> )	F ( F1 <sup>1)</sup>	J (RTJ)
CL600; 900; 1500; 2500	B <sup>3)</sup> (RF)	DL (GF)	F (FF)	J (RTJ)

<sup>1)</sup> - do PN160; <sup>2)</sup> - tylko dla CL300; <sup>3)</sup> - B1 – (Ra=12.5 µm, concentric surface structure "C"), B2 – (Ra as agreed with the customer);  
() - identification of connections as per ASME B16.5

Possible execution of flanges per specification and indicated standards

Face-to-face dimensions: - flanged valves as per PN-EN 60534-3-1; PN-M-74005; ISA S75.16-1993; Fig. 5; Table 16; 17

- welding ends valves; Fig. 5; Table 18

- as per PN-EN 60534-3-3: for PN 10...100 and CL150...600

- as for flanged valves PN 160: for PN 160 and CL900

- as for flanged valves PN 400: for PN 250...400 and CL1500...2500

Materials: - as per Table 2;

Relationship between working pressure and temperature as per Table 3...9.

**Bonnet (2):**

- standard

- extension

- bellows seal (PN10...40; CL150...300)

**Valve plug (3a,b,c):** - piston, sleeve guided, hard. Rangeability: 50:1

- variants:

unbalanced,

balanced, (from DN40 - K<sub>vs</sub> 25),

balanced with pilot, (from DN50 - K<sub>vs</sub> 40)

equal percentage - P

linear - L

- flow characteristics:

**Valve seat (4):** - fitted-in and sealed with body, hard (tight seat after consulting the manufacturer)

**Valve plug stem (5):** - burnished, polished sealing face.

**Control cage (6A):** - perforated element executing preset flow characteristics and fixing seat.

**Choke cage (6B,C):** - perforated valve seat fixture, causing reduction in pressure drop between seat and plug.

**Body gasket (7), seat gasket (8), control cage gasket (9):** spiral, graphite+1.4404 in all executions.

**Stem packing (9):**

- PTFE-V packing, compressed with spring bolt (18a),

- ring gaskets formed in braided packing cords (PTFE +GRAPHITE),

- graphite kits (expanded and silky graphite) or gaskets formed in braided graphite cords,

- TA-LUFT sealing with PTFE-V packing kit or graphite kit; packing structure as per Fig.s 1 and 2, range of applications as per Table 10.

**Leakage class:** (as per PN-EN 60534-4)

-basic: (class IV) less than 0,01% K<sub>v</sub>

-enhanced: (class V)  $3 \cdot 10^{-4} D \cdot \Delta p$  [cm<sup>3</sup>/min]

where D (mm) - is seat diameter as per Table 10

$\Delta p$  [bar] -actual pressure drop in closed valve.

**Fluid flow direction:** Under the plug for valves as per Fig. 1a and 1b, over the plug for valves as per Fig. 1 c

**Flow coefficients:** as per Table 11.

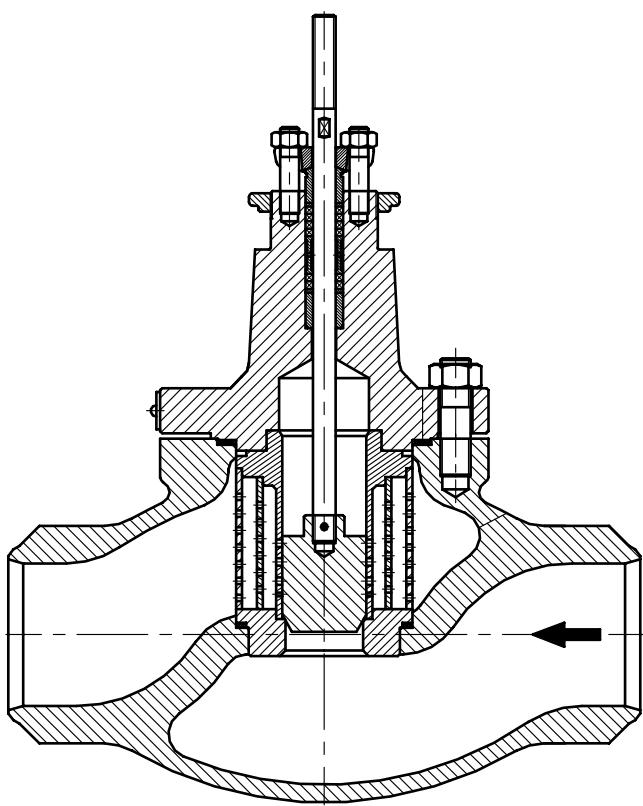


Fig. 1a. Valve - unbalanced plug.

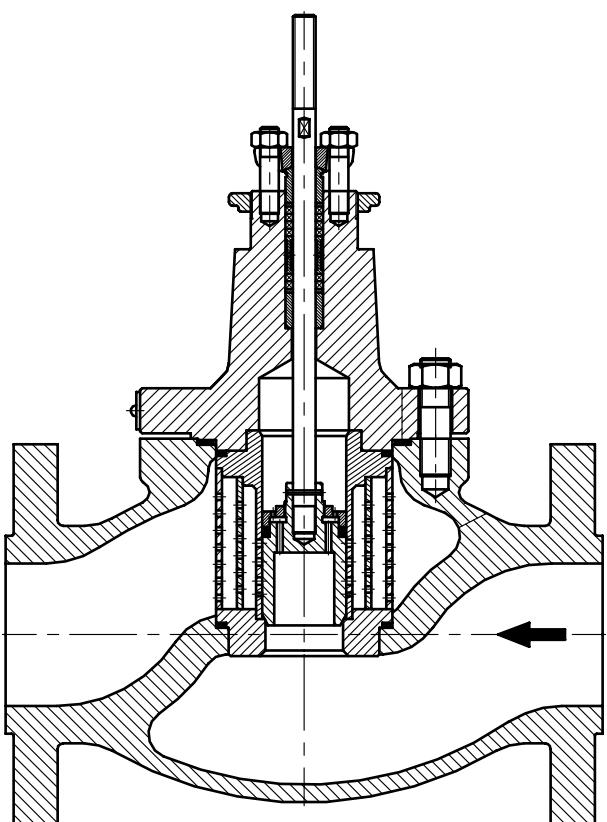


Fig. 1b. Valve - balanced plug.

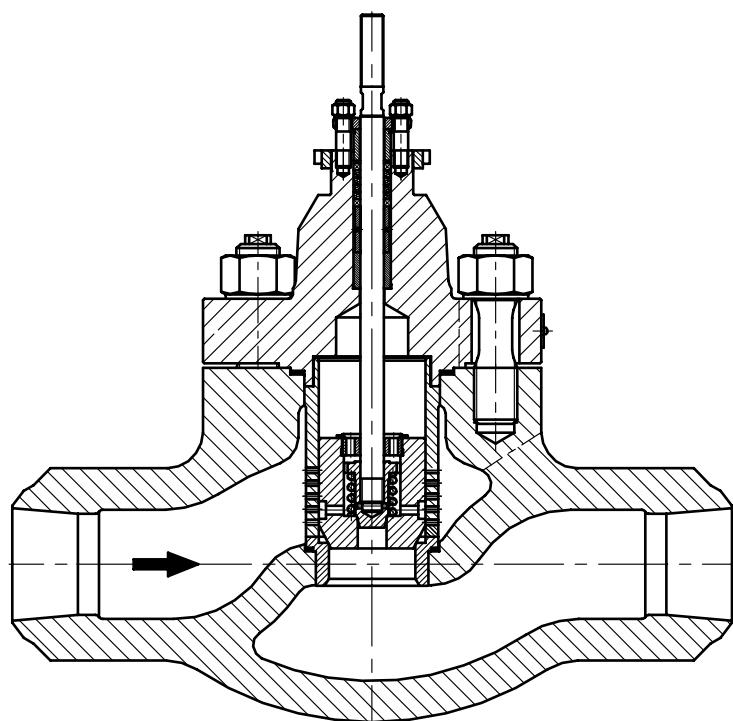


Fig. 1c. Valve - balanced plug with pilot.

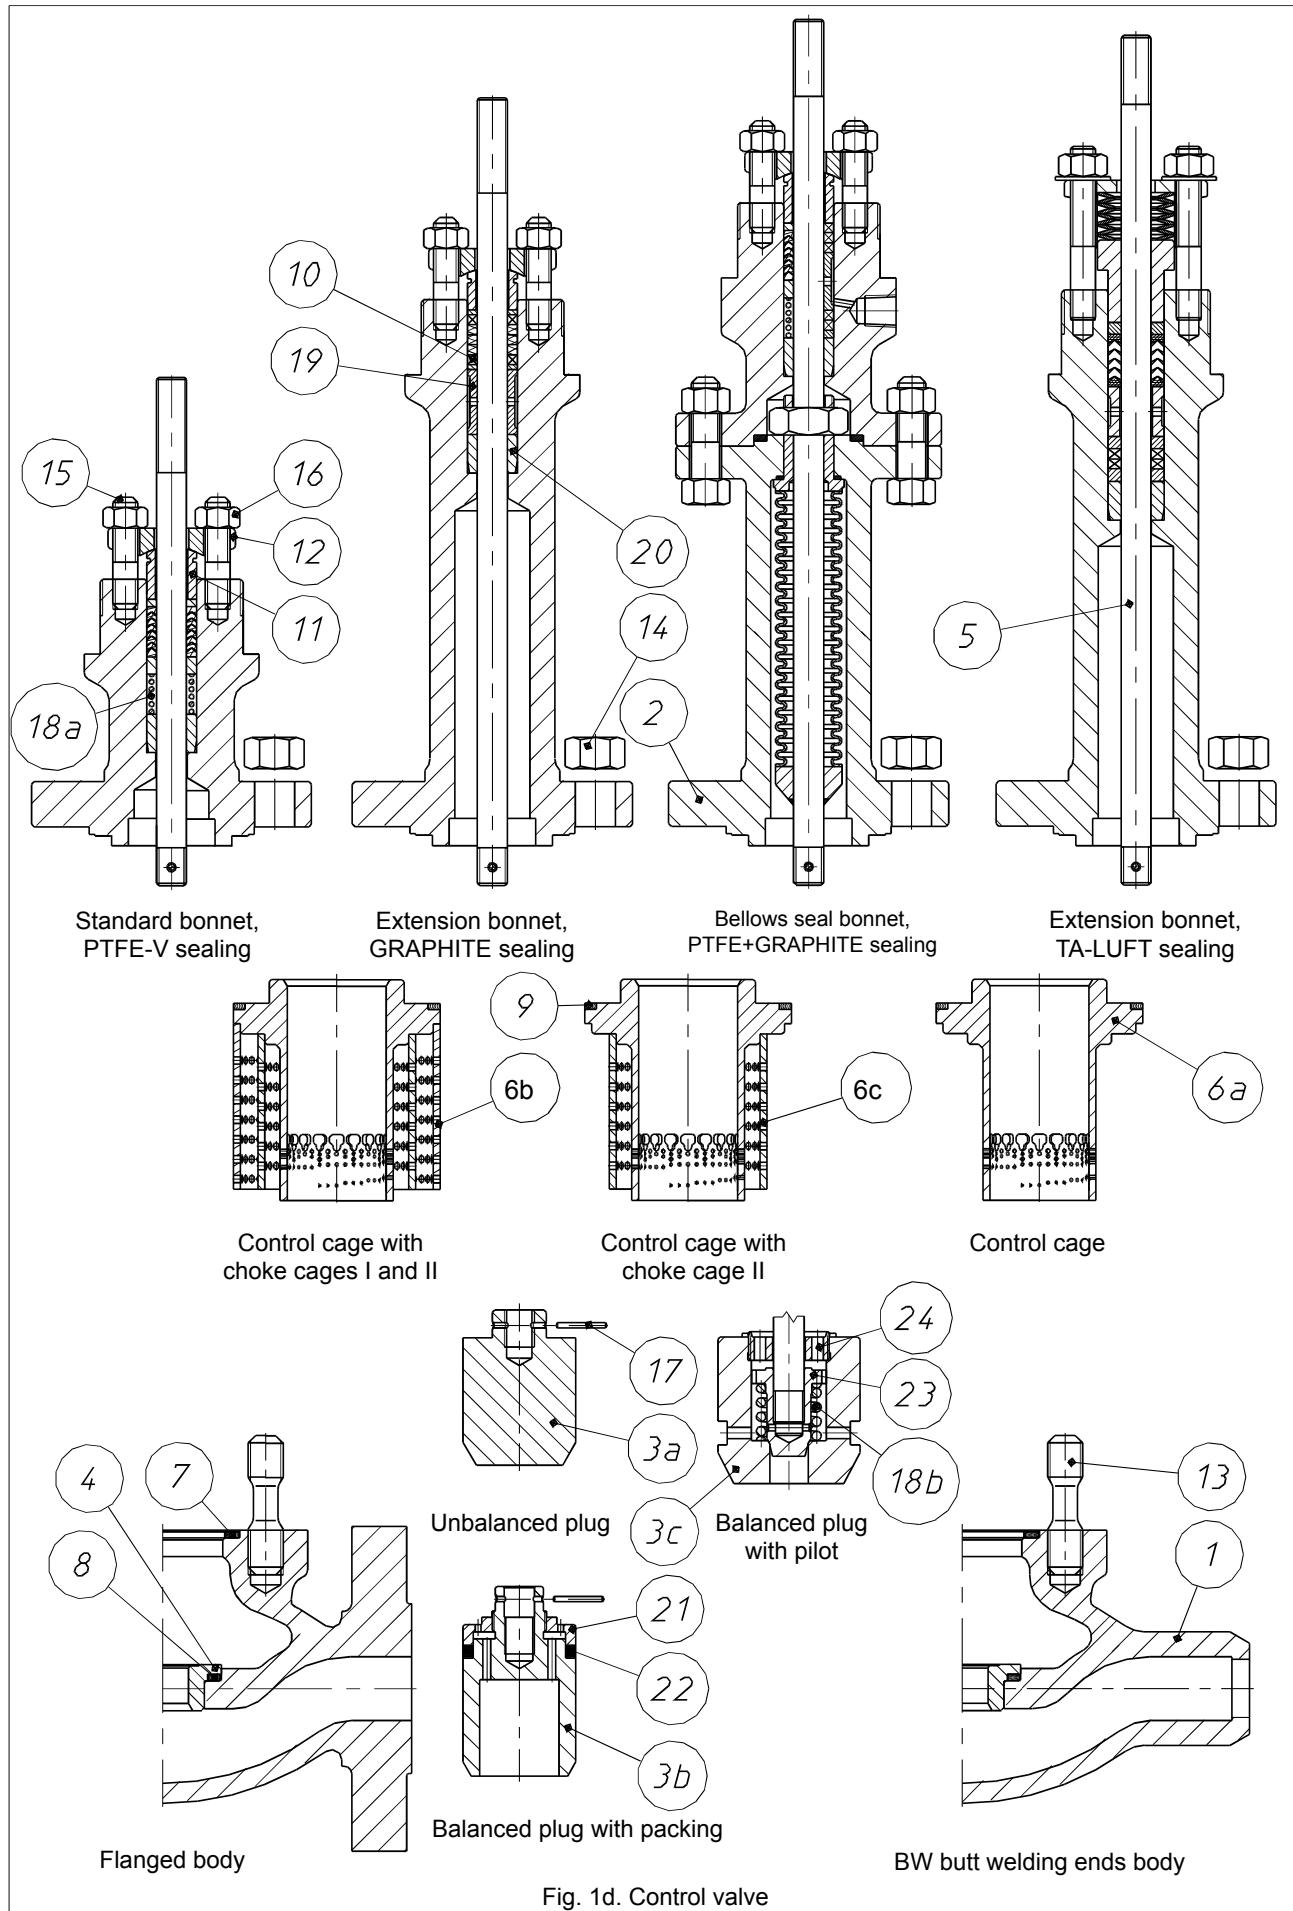


Fig. 1d. Control valve







## DESIGN

Single-ported globe control valves S1B are recommended for application under heavy-duty working conditions, with excessive noise, flashing or choked flow. Selection of designs and materials depends on working conditions. It is based on computer-aided calculations of flow coefficients, noise level, fluid status, and effectiveness of such actions depends on data submitted by customer. Application of perforated control elements allows noise reduction by 10dBA regarding execution with contoured plug. Further noise reduction (by 5 dBA) can be achieved by application of choke cage, which causes reduction in pressure drop between plug and seat. Such design is also recommended in case of choked flow, cavitation and flashing. Perforated structures feature higher pressure recovery coefficient  $F_L$ , which allows achievement of higher flow at same  $K_v$  and  $\Delta p$  as in basic design. Customers shall also appreciate possibility of achieving maximum flow ratio for all nominal sizes and control characteristics, and reduction in actuator costs due to application of balanced plugs. In case of compressive media it is advisable to apply diffusers at the valve outlet. In justified cases (noise, choked flow) diffusers can be fitted with additional perforated choke structures in the form of plates assembled between flanges or welded in diffuser interior. On customer's request, also when flow conditions justify such solution, special executions are recommended concerning materials, flow ratios, control characteristics, leakage class, etc.

Table 9. Packing types with application ranges.

Packing	PN	Temperature [°C]		
		Bonnet		
		Standard	Extension	Bellow seal
PTFE-V	up to CL600 )*	-46...+200	-198...-46 +200...+300	-100...+200
PTFE + Graphite				
PTFE-V / TA-LUFT				
Graphite	up to CL2500 )*	+200...+300	+300...+537 ,(+650)**	+200...+400
Graphite / TA-LUFT				

)\* PN10...40; CL150...3000 for below seal bonnet

)\*\* for welding ends valves

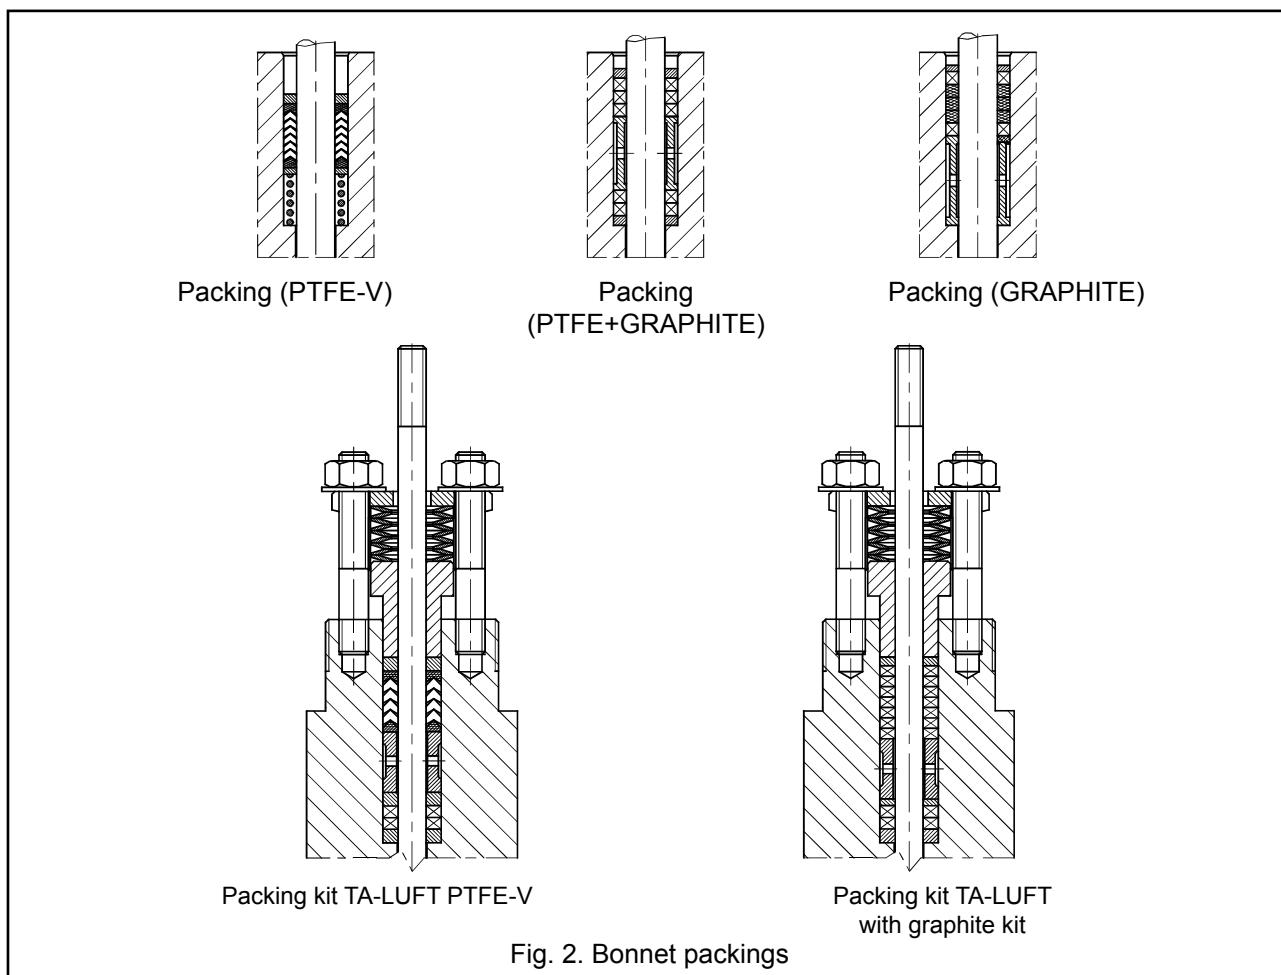


Fig. 2. Bonnet packings





## NOISE REDUCTION:

Should noise due to cavitation or aerodynamic phenomena exceed level acceptable by customer, it can be reduced by applying the following solutions:

- perforated valve plugs (Fig. 1a, 1b and 1d)
- silencer plates on valve outlet and/or inside of reduction joint (Fig. 3,4 and Table 13)
- reduction ends (diffusers) - (Fig. 4)

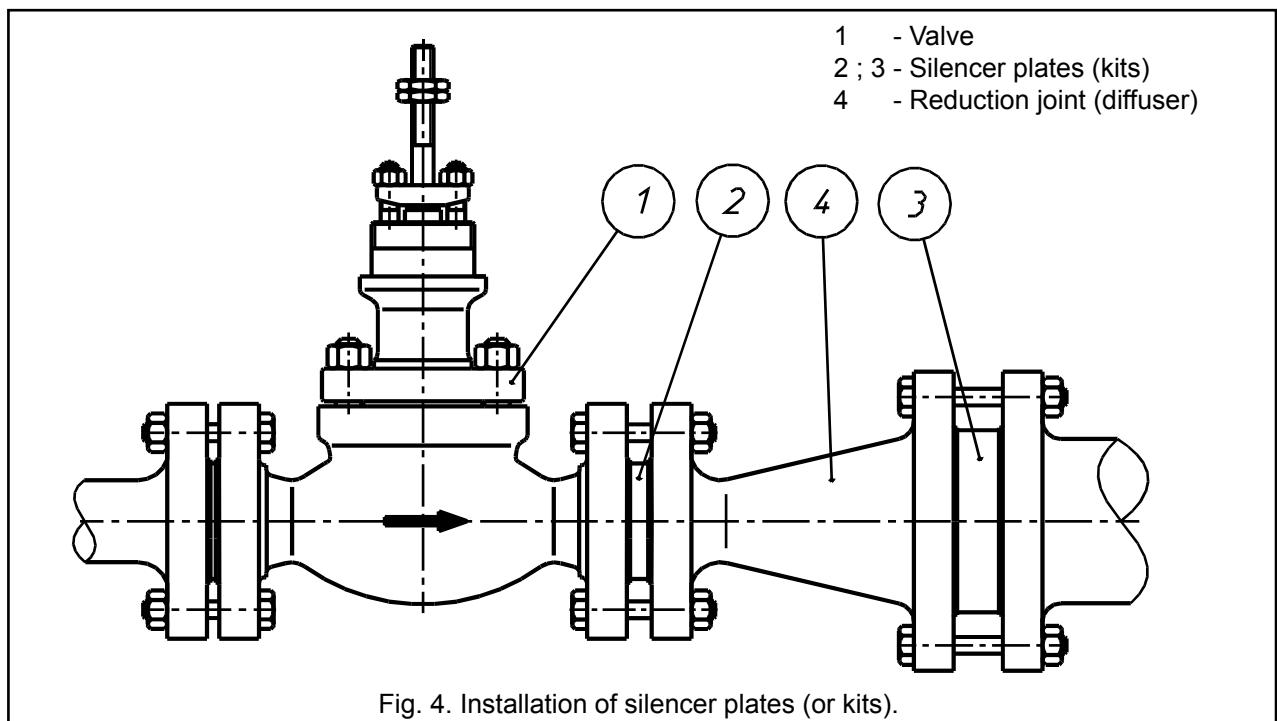
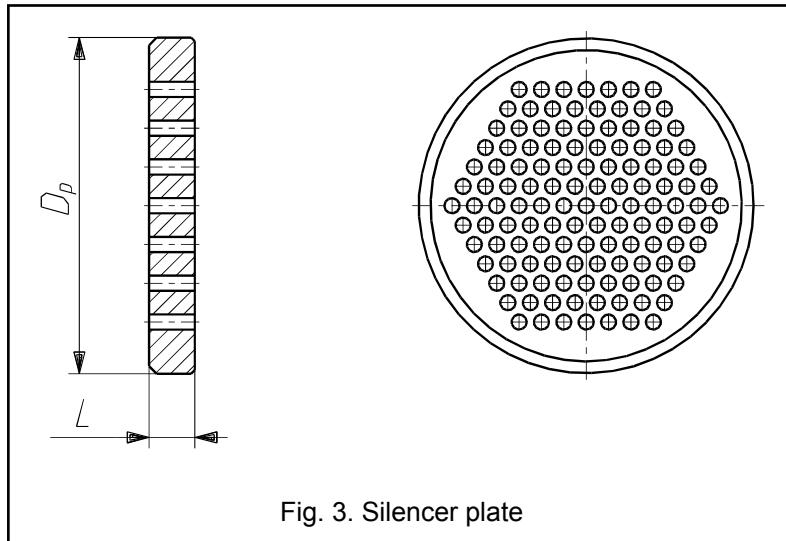


Table 14: Dimensions and flow ratios for silencer plates

DN	25	40	50	80	100	150	200	250	300	350
Kvs	10	25	40	94	160	320	500	800	1000	1500
	9	22,5	36	84	144	288	450	720	900	1350
	8	20	32	75	128	256	400	640	800	1200
	7	17,5	28	66	112	224	350	560	700	1050
L [mm]	5	6		10		15		20		
D <sub>p</sub> [mm]	68	88	102	138	162	218	285	345	410	465

Multi-plate silencer kits are customized for requirements of individual processes.

## DIMENSIONS AND WEIGHTS

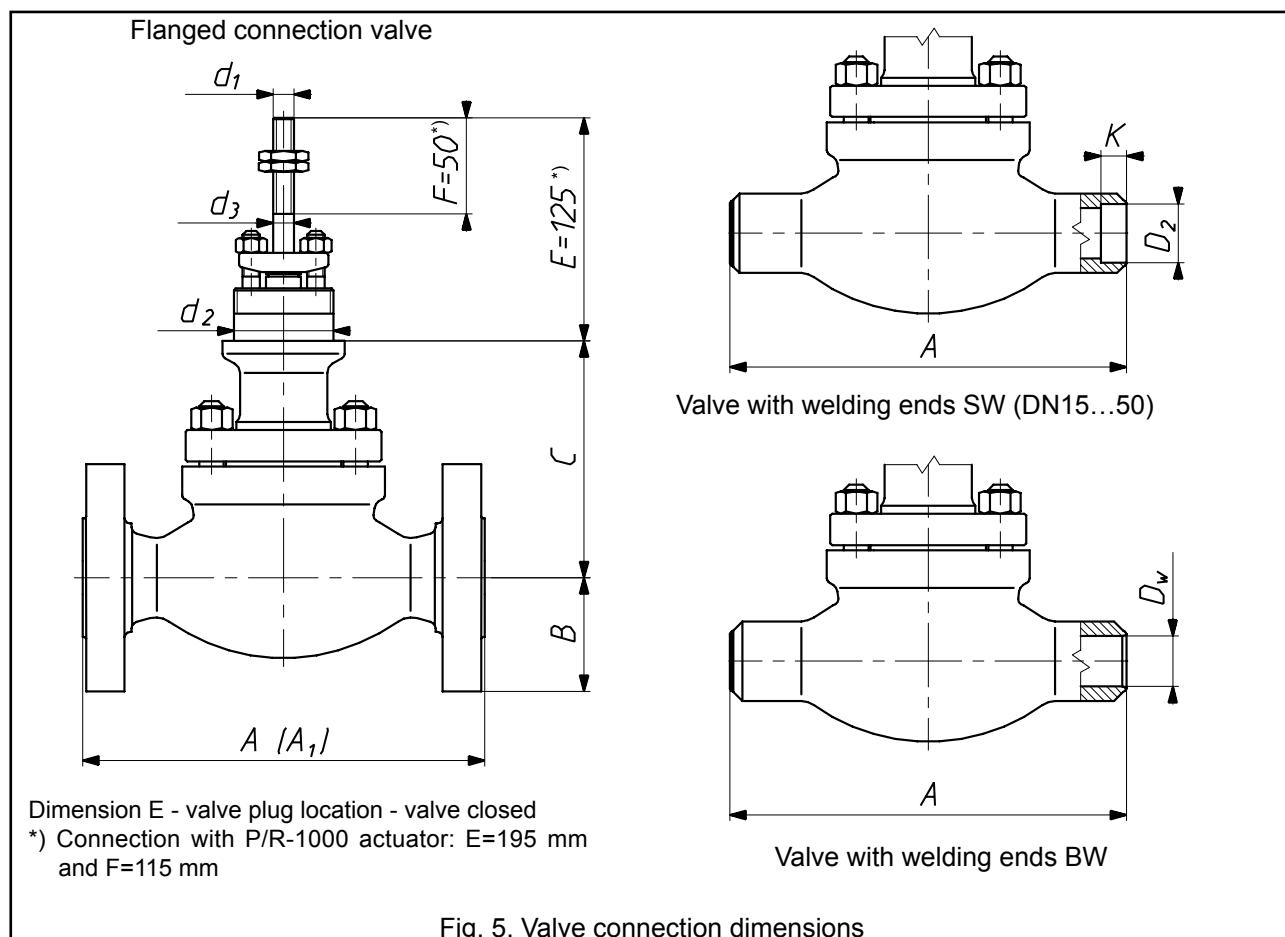


Table 15a: Control valves connection dimensions

DN	25						40						50					
PN/CL	PN10... CL300	PN63... CL600	CL900; PN160	PN250; CL1500	PN320	PN400; CL2500	PN10... CL300	PN63... CL600	CL900; PN160	PN250; CL1500	PN320	PN400; CL2500	PN10... CL300	PN63... CL600	CL900; PN160	PN250; CL1500	PN320	PN400; CL2500
B max	63	70	75	80	90	75	85	93	98	110	83	98	108	105	118			
C	DS	135	149		193		145	172		214		155	175		237			
	DW	306	320		364		306	348		385		326	345		402			
	DM	254	-	-	-	-	254	-	-	-	-	270	-	-	-	-	-	
Weight [kg]	8	8,5		9,5		15,5	17,5	19	20	22	23	22	25	28	31	33	34	
DN	80						100						150					
PN/CL	PN10... CL300	PN63... CL600	CL900; PN160	PN250; CL1500	PN320	PN400; CL2500	PN10... CL300	PN63... CL600	CL900; PN160	PN250; CL1500	PN320	PN400; CL2500	PN10... CL300	PN63... CL600	CL900; PN160			
B max	105	145	120	133	138	153	128	138	145	155	168	185	160	178		190		
C	DS	206	233		257		217	252		329			287		365			
	DW	375	402		447		407	442		498			426		483			
	DM	405	-	-	-	-	405	-	-	-	-	-	470	-	-	-	-	
Weight [kg]	40	43	44	50	51	52	65	72	75	86	89	95	132	147	156			
DN	200						250											
PN/CL	PN10...CL300			PN63...CL600			PN10...CL300	PN10...CL300 (kv800)		PN63...CL600								
B max	190			235			258			255								
C	DS	439						458										
	DW	539						558										
	DM	580			-			580			660							
Weight [kg]	195			220			320			330			360					

DN300 - special execution,  
technical data according to  
individual inquiries.  
(table: 15a and 15b).

NOTE: Weight of valve with standard bonnet and without actuator.

Table 15b: Control valves connection dimensions

DN	25...50	50	80	80; 100	80; 100	100	150				200	200; 250				
Kvs	10...25	40	25	40	63; 94	125; 160	63; 94	125; 160	200; 250	320	94	125; 160	200; 250	500	630; 800	
Stroke	20	38	20	38	38	50	38	50	63	80	38	50	63	80	100	
$d_1$	M12x1,25				M16x1,5				M20x1,5		M16x1,5		M20x1,5		M24x1,5	
$d_2^1)$	57,15 / 2 1/4"-16UN2A					84,15 / 3 5/16"-16NS2A					95,25 / 3 3/4"-12UN2A					
$d_3$	12		16			20				24						
Actuator	160 250 400 630 R-630T	630 250 400 630 R-630T	160 250 400 630 R-630T	630 1000 1500	1000 1500	630 1000 1500	1000 1500	1000 1500T	1500 1500T	1000 1500	1000 1500 1500T	1000 1500 1500T	1000 1500 1500T	1500 1500T		

NOTE:

1) For DN80 and DN100 valves with TA-LUFT packing  $d_2 = 84.15$

Table 16. Control valve length, flanges.

DN	Dimensions A [mm]										
	PN / DIN				CL						
	10; 16; 25; 40	63 - 100	160	250 - 320	400	CL150	CL300	CL600	CL900	CL1500	CL2500
25	160	230	230	260	300	184	197	210	248	273	308
40	200	260	260	300	350	222	235	251	270	311	359
50	230	300	300	350	400	254	267	286	311	340	400
80	310	380	380	450	500	298	317	336	387	460	498
100	350	430	430	520	580	352	368	394	464	530	575
150	480	550	550	*	*	451	473	508	556	*	*
200	600	650	*	*	*	543	568	610	*	*	*
250	730	775	*	*	*	673	708	752	*	*	*
300	special execution, technical data according to individual inquiries										
	* higher nominal pressures available after agreement with the manufacturer										

Note: Dimension A presented in Table 15 for CL150; CL300; CL600; CL900; CL1500; CL2500 apply to bodies with B seat (RF). For other executions dimension  $A_1$  can be calculated using relations presented in Table 17.

Table 17. Algorithms for calculation of control valve body length for valves with flanged end

- with groove
- with races
- with ring-joint

Body type and identification	Pressure CL	DN	$A_1$
PN / ANSI			
With groove DL / (GF)	CL300		$A_1 = A + 5 \times 2$
With races F / (FF)	CL600 CL900 CL1500 CL2500	25...250	$A_1 = A - 1,5 \times 2$
With ring-joint J / (RTJ)	CL150	25...250	$A_1 = A + 6,5 \times 2$
	CL300	25...40	
	CL300	50...250	$A_1 = A + 8 \times 2$
	CL600 CL900 CL1500	25...40	
	CL2500	25	$A_1 = A$
	CL600	50...250	
	CL900 CL1500	50...100	$A_1 = A + 1,5 \times 2$
	CL900	150	
	CL2500	80	$A_1 = A + 3 \times 2$
		100	$A_1 = A + 4,5 \times 2$



Table 20: Dimensions of non-processed butt welding ends (executed as cast) and lengths of reduction stubs.

DN	Pressure	A max	B min	L
25	PN 10...40, CL 150, 300	38	20	50
	PN 63...100, CL 600	48	20	
	PN 160, CL 900	40	23	
	PN 250...400, CL 1500,2500	48	23	
40	PN 10...40, CL 150, 300	64	42	75
	PN 63...100, CL 600	75	42	
	PN 160, CL 900	66	38	
	PN 250...400, CL 1500,2500	66	28	
50	PN 10...100, CL 150...600	80	55	100
	PN 160, CL 900	80	50	
	PN 250...400, CL 1500,2500	92	42	
80	PN 10...40, CL 150, 300	110	82	150
	PN 63...100, CL 600	122	82	
	PN 160, CL 900	111	76	
	PN 250...400, CL 1500,2500	127	56	
100	PN 10...100, CL 150...600	144	102	
	PN 160, CL 900	144	102	
	PN 250...400, CL 1500,2500	165	81	
150	PN 10...40, CL 150, 300	183	160	
	PN 63...100, CL 600	196	160	
	PN 160, CL 900	217	154	
200	PN 10...40, CL 150, 300	243	200	
	PN 63...100, CL 600	248	200	
250	PN 10...40, CL 150, 300	291	248	
	PN 63...100, CL 600	346	248	

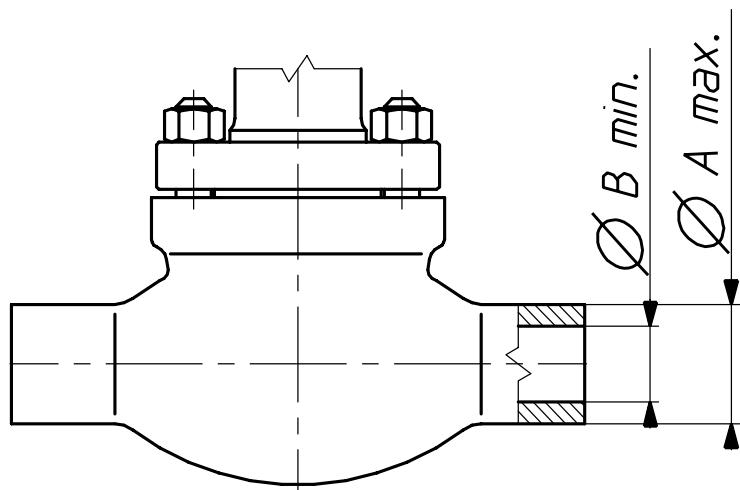


Fig. 6. Dimension of butt welding ends executed as cast

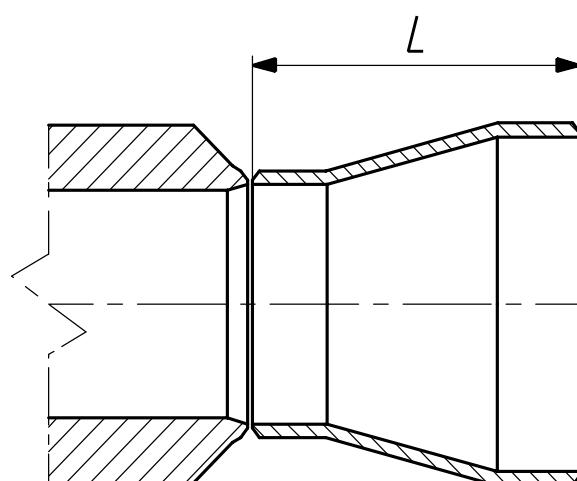


Fig. 7. Reduction stub

Table 21: SW socket welding ends.

DN	D <sub>2</sub>	K
25	34	
40	48,7	13
50	61	16

**VALVE ACTUATOR:**

- Pneumatic:**
- diaphragm multi-spring actuator as per Table 21:
  - P1/R1 - cast yoke, no handwheel
  - P1B/R1B - cast yoke, side-mounted
  - P/R - column type, no handwheel
  - PN/RN - column type, top-mounted handwheel

**NOTE:**

P	- direct action; air-to-close
R	- reverse action; air-to-open

Table 22: Pneumatic actuators.

Type	Size	Diaphragm effective area [cm <sup>2</sup> ]	Stroke [mm]	Revolutions per stroke
P/R ; PN/RN	160	160	20	5
	250	250		
P1/R1 ; P/R ; P1B/R1B ; PN/RN	400	400	20 ; 38	5 ; 9
	630	630		
	R-630T *)	2 x 630	38 ; 50 ; 63	8 ; 10 ; 13
	1000	1000		
P1/R1 ; P1B/R1B	1500	1500	38 ; 50 ; 63 ; 80 ; 100	8 ; 10 ; 13 ; 16 ; 20
	1500T	2 x 1500		

\*) - there are no top mounted handwheel for R-630T

Table 23: Sizes and weights of pneumatic actuators P/R and PN/RN - Fig. 8.

Actuator size	D <sub>1</sub>	D <sub>2</sub>	H <sub>1</sub>	H <sub>2</sub>	Weight [kg]	
	mm				P/R	PN/RN
160	210	225	306	468	9	13,5
250	240		324	486	10	14,5
400	305		332	494	16	20,5
630	375	305	424	586	30	37
R-630T		-	638	-	45	-
1000	477	450	607	847	74	100
1500	550	-	704	-	95	-
1500T		-	1008	-	200	-

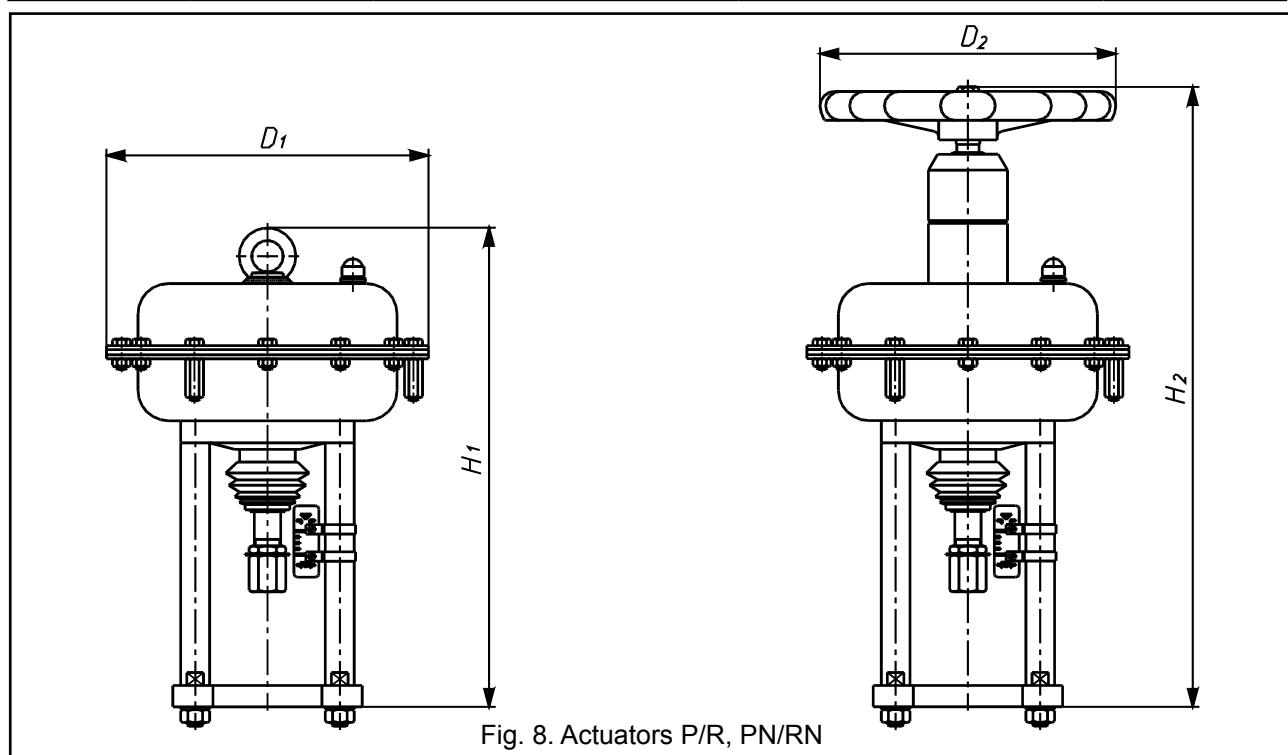


Fig. 8. Actuators P/R, PN/RN

Table 24: Sizes and weights of pneumatic actuators P1/R1 and P1B/R1B - Fig. 9

Actuator size	B	D <sub>1</sub>	D <sub>2</sub>	H	Weight [kg]	
	mm				P1/R1	P1B/R1B
400	255	305	225	453	20	28
630	280	375	305	548	40	50
1000	340	477		773	85	105
1500			450	833	120	150
3000	410	550		1138	225	255

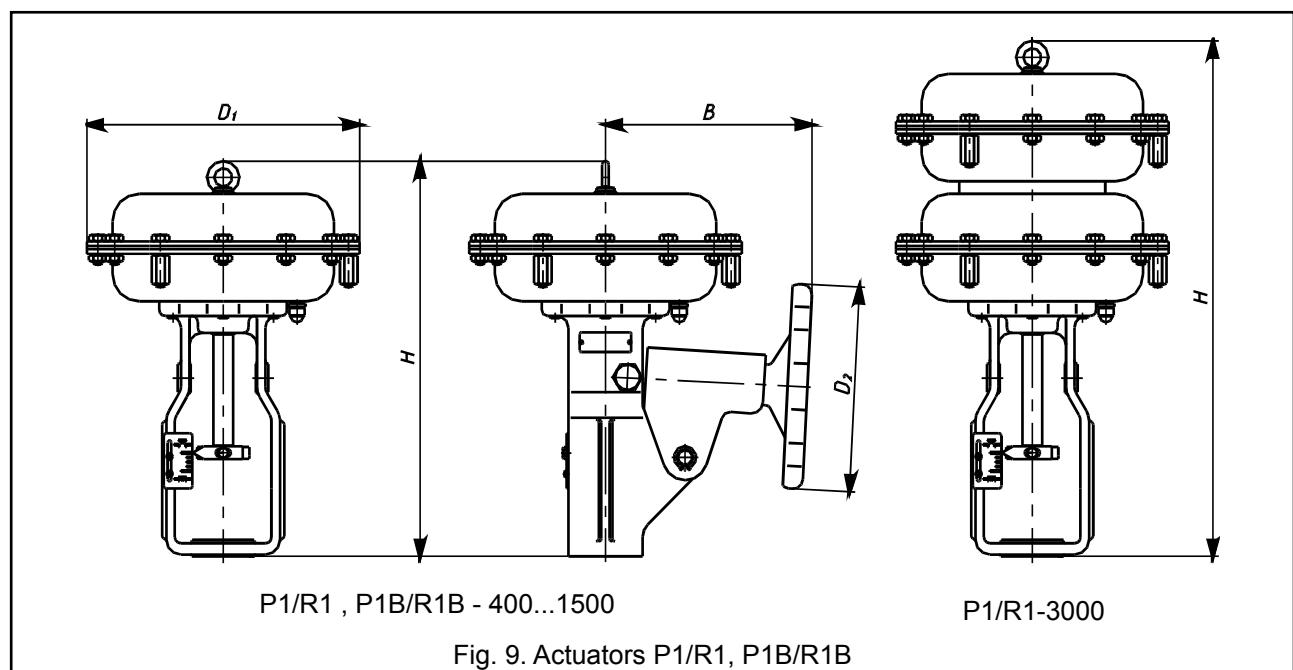


Fig. 9. Actuators P1/R1, P1B/R1B

Control air connections:

1/4" NPT ; NPT 1/2", Rc 1/2"

- tube diameters:

6x1 ; 8x1 ; 10x1; 12x1

- spring ranges:

20...100kPa ; 40...120kPa ; 60...140kPa

- 3 springs

40...200kPa ; 80...240kPa ; 120...280kPa

- 6 springs

180...380kPa<sup>\*)</sup>

- 12 springs

(not applicable for actuators P/R; P1/R1-250; 400)

For actuator P1/R1-3000 (Tandem) -

for each range double the above numbers of springs (tandem)

- maximum supply pressure:

actuator size 160...630 - 600kPa

actuator size R-630T and 1000...1500 - 500kPa

- accessories (upon request):

side-mounted handwheel (P1/R1) or topmounted handwheel (P/R) ,  
pneumatic positioner,  
electro-pneumatic positioner,  
smart electro-pneumatic positioner,  
air-set,  
three-way solenoid valve,  
lock-up valve,  
position transmitter,  
limit switches.

**Electric:** - electric drives; domestic and foreign electro-hydraulic drives (for details and technical specification refer to manufacturers catalogs)

**Manual:** - manual drive type 20, Fig. 10 Table 25.

Table 25: Manual drives type 20 - types, sizes and weights.

Type	Stroke [mm]	$d_1$	$d_2$	H	D	rev/stroke	Weight [kg]
20-20-57-M12	20	M12x1,25	57,15	265	228	8	7,5
20-20-84-M12			84,15				
20-38-57-M12	38	M16x1,5	57,15	385	298	15	10
20-38-57-M16			84,15				
20-38-84-M16		M16x1,5	95,25				
20-38-95-M16		M16x1,5	57,15	385	457	16	16
20-50-57-M16	50	M20x1,5	84,15				
20-50-84-M16			95,25				
20-50-95-M16		M20x1,5	84,15	533	610	19	24
20-63-84-M20	63	M20x1,5	95,25				
20-63-95-M20			84,15				
20-80-84-M20	80	M24x1,5	95,25				
20-80-95-M20			84,15				
20-100-95-M24	100	M24x1,5	95,25				

Marking:

Example: 20-38-57-M16 - manual drive type 20; stroke - 38mm;  $d_2=57,15\text{mm}$ ;  $d_1=\text{M}16\times1,5$

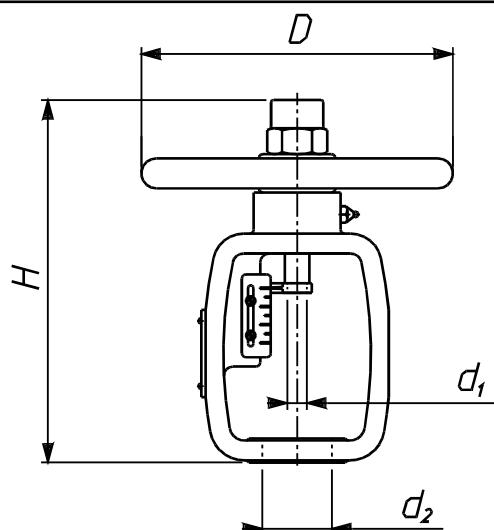


Fig. 10. Manual drive type 20.

#### SPECIAL OPTIONS:

##### - oxygen and hydrogen option:

Application of adequate materials, mechanical and chemical cleaning, inspections and assembly ensure compatibility with oxygen and hydrogen flows.

##### - low temperature media option:

Application of adequate materials and special bonnet design ensures effective isolation of valve drive from the impact of low temperatures. Used mostly for liquid oxygen and liquid nitrogen.

##### - acid gas option:

Parts of the valve can be made of materials and under conditions ensuring valve operation with gases of  $\text{H}_2\text{S}$  content as per NACE MR-0175.

##### - heat jacket option:

Design and technical parameters as per customer's specification.


##### - balanced valves with pilot:

Construction allows achievement of high leakage class at high pressure drops and reduced available force of actuator, flow direction - above the plug.

##### - valves with non-cast bodies:

If a special construction of the valve body is needed, it is possible to design a valve for individual customer's needs (angle valves – type L and Z).

## CLASSIFICATION AND MARKING:

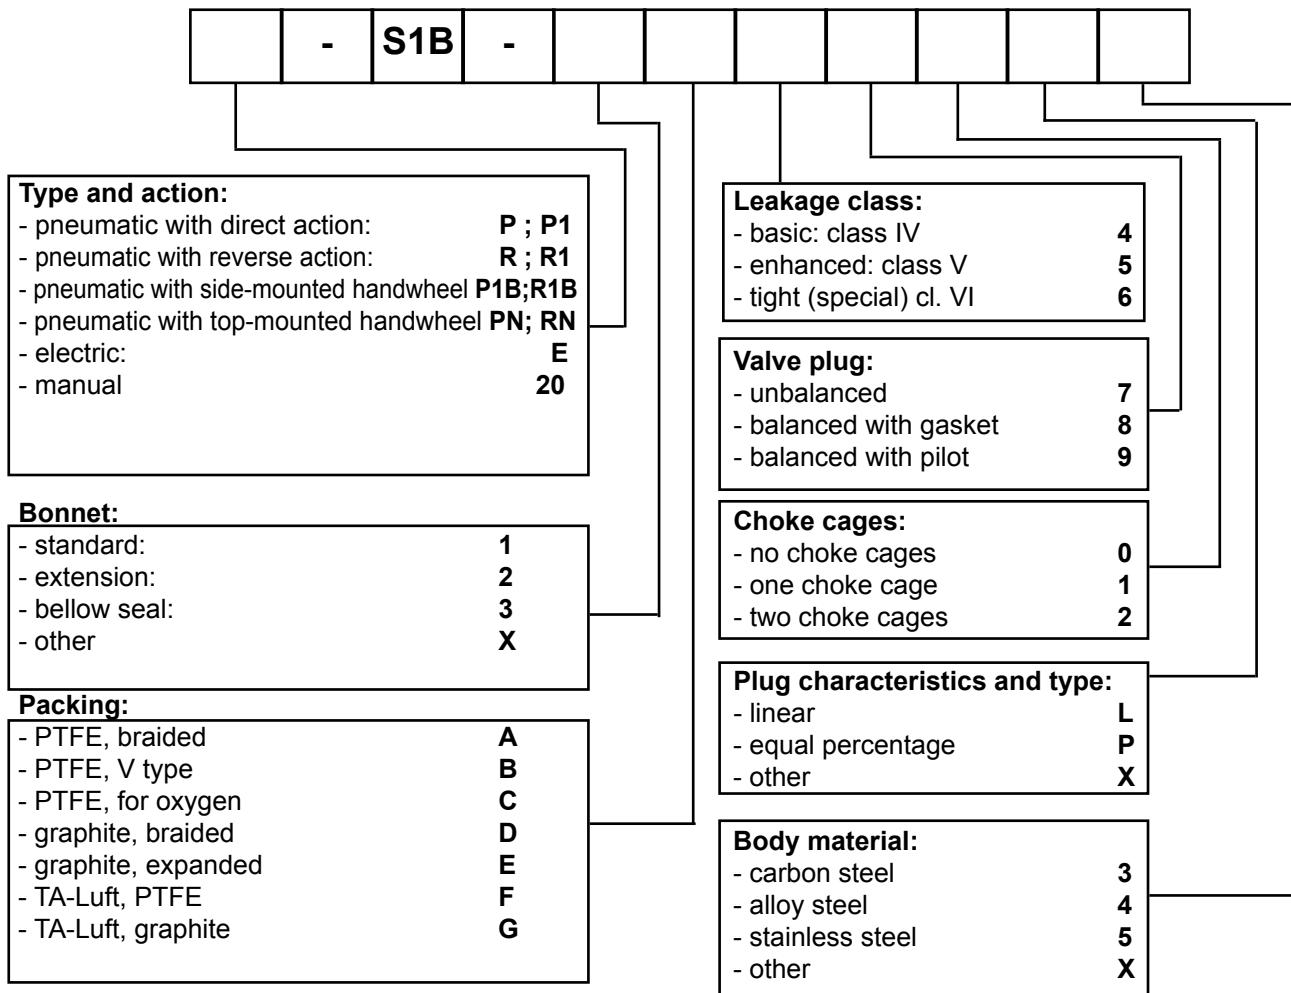

## MARKING EXAMPLE:

Control valve type S1B with pneumatic actuator of reverse type, complete with top-mounted handwheel, extension bonnet, packing: expanded graphite, leakage class cl.VI, with throttling cage, balanced equal-percentage plug, body material: stainless steel.

**RN-S1B-2E481P5**

Marking is shown on valve nameplate.

Additionally, it shows:

- nominal size [DN],
- nominal pressure [PN],
- max working temperature [TS],
- max working pressure [PS],
- test pressure [PT],
- flow ratio [Kvs],
- plug stroke [H],
- plug stroke fluid group [1 or 2],
- serial number and year of manufacture.

## ORDERING:

In case of valves with choke cages please specify flow coefficients for the cage or other information that is necessary to calculate that parameter in accordance with the technical data questionnaire. Contact our staff from the Marketing and Sales Department as well as the Technical and Development Department for assistance to select the most suitable valves.